


PORCELAIN PAVERS

TORONTO 115 Carnarvon Street Toronto, ON M6M 3C9 T 416 413 9008 F 416 413 9652 TROY 1700 Stutz Drive, Ste 122 Troy, MI 48084 T 248 643 6520 F 248 643 6523 Please note, all specifications have been supplied by the manufacturer and are subject to change.

Email: mail@cercantile.com Website: www.cercantile.com

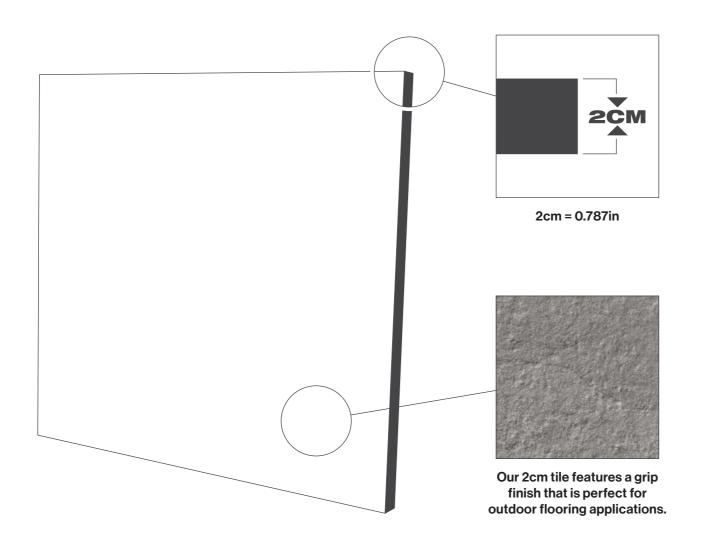

→ MOOD WOOD | HONEY 12" x 48"



OUTDOOR 25M

	PORCEL	AIN PAVERS			
BENEFITS	3				pg. 2
+One					pg. 7
Chalk	Greige	Ash			na 11
EARTH					pg. 11
Moon White	Miami White	Manhattan Grey	Light Grey	Multicolor	Dark Grey
Farmhou	JSE LIVING	i			pg. 19
Mahaatay	Pewter	Millatona	Slata		
Alabaster LITH	Pewter	Millstone	Slate		pg. 23
					Pg. 20
Legacy White	Antique Cream	Heirloom Blue			
Mood W	/OOD				pg. 27
7.00					
White	Honey	Grey			
Quartz					pg. 31
Extra White	White	Grey			
Specifications					pg. 36
Installation Methods					pg. 39

BENEFITS

OF MILE®stone OUTDOOR 2CM PORCELAIN PAVERS



Resistant to **Thermal Shock**

Won't break due to gradual or sudden temperature changes (-40°F — 210°F).



Made from Natural Raw Materials

Sourced locally within 500mi of our production facility, lowering our carbon footprint.



Unmatched **Durability**

Stronger and more resilient than any alternative paving solution.



Frost Resistant

Unaffected by frost or freezing since our pavers don't absorb water.



V.O.C. Free

Emits 0 VOCs to protect occupants and environmental health.



Cost-Over-Life Savings

With a 60+ year life expectancy, our pavers provide a low life cycle cost analysis.



Resists Microbial Growth and Damage

Unaffected by moss, mold, and verdigris.



Scratch and **Stain Resistant**

Scratch and stain resistant, outdoor porcelain pavers can handle high traffic areas.



Easy to Clean and Sanitize

No harsh chemicals needed to clean, nonporous material is resistant to stains.



Versatile Installation Applications

Install over grass or gravel, mortared in or simply laid on the ground.



UV Resistant and Colorfast

Won't fade from UV exposure, retains original color over product life.



Available in a Broad Range of Styles

Styles range from stone, concrete, or wood looks in a variety of sizes.

✓ QUARTZ | GREY 24" x 24"



Virtually No Maintenance

Once installed, pavers require minimal upkeep and are easy to replace.



Slip Resistant and Quick Draining

Perfect for pool decks, terraces, or even simple garden paths.






Easy To Install

Requires minimal materials and effort to install nearly anywhere.





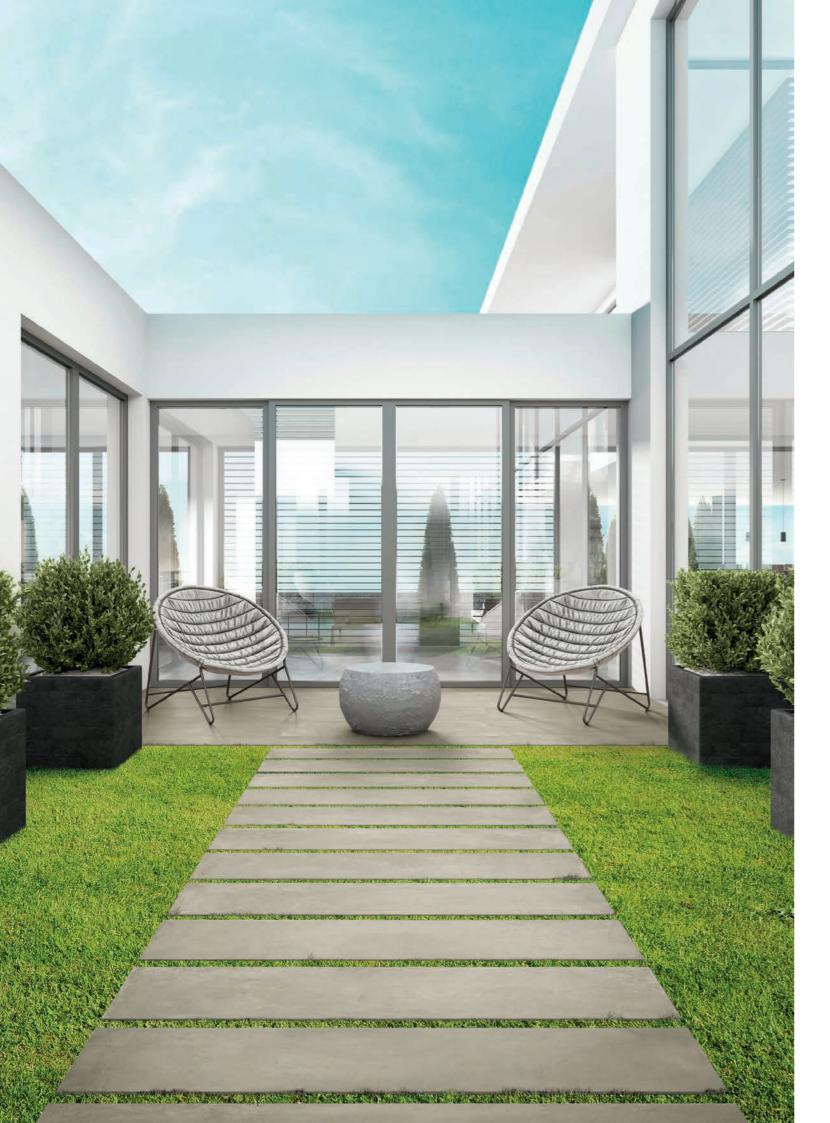


+ONE

2ČM

CONCRETE LOOK





24" x 48" Rectified

Chalk 1101841 Greige 1101842 Ash 1101843



24" x 24" Rectified

 Chalk
 1101414

 Greige
 1101415

 Ash
 1101416



Chalk 1101411 Greige 1101412 Ash 1101413

COLORS








GREIGE



ASH


◆ +ONE | GREIGE 12" x 48" + 24" x 24"

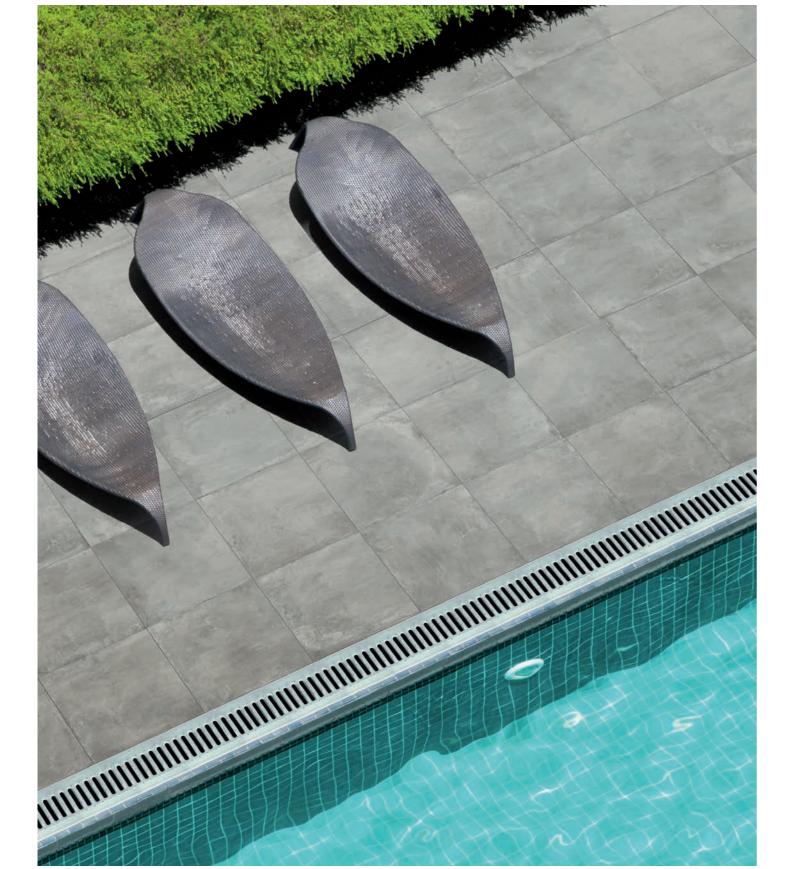

+ONE | ASH 24" x 24"



► +ONE | CHALK 12" x 48" + 24" x 24"

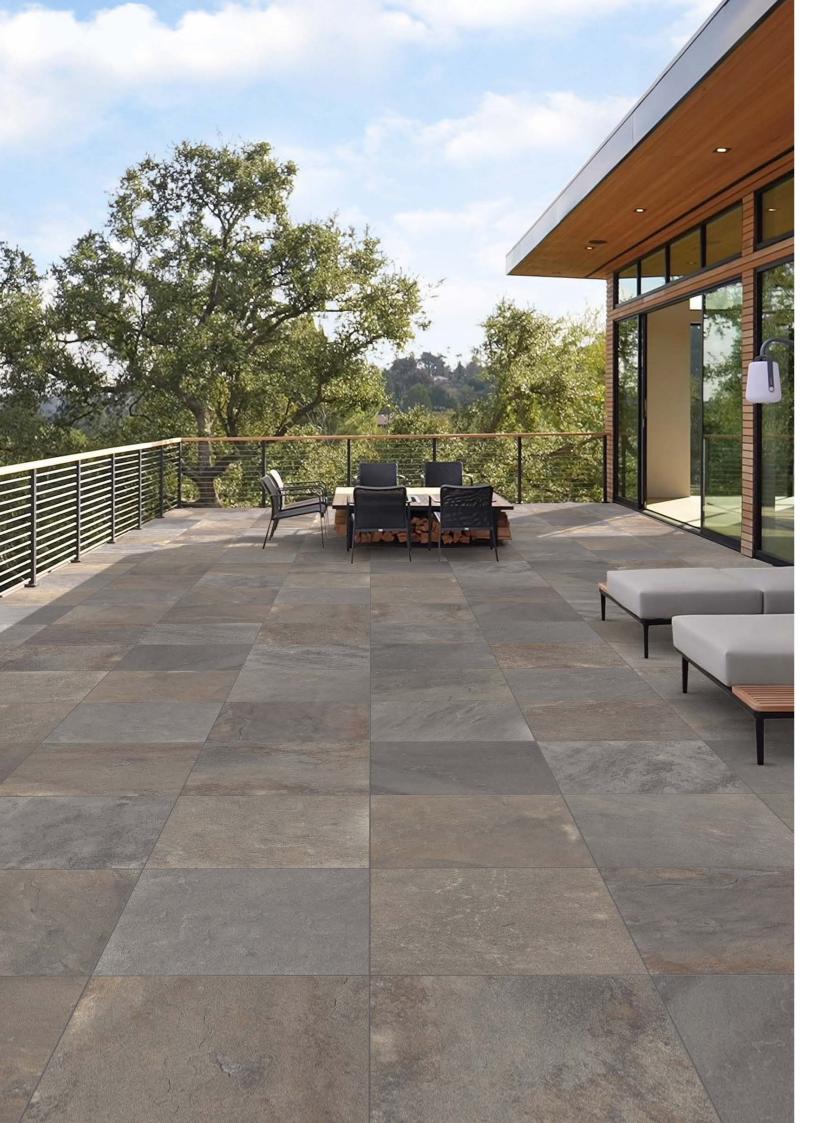

EARTH

2ČM

STONE LOOK

SIZES



24" x 24" Rectified

Dark Grey	1096343
Light Grey	1096344
Manhattan Grey	1096348
Miami White	1096349
Moon White	1096350
Multicolor	1096342

COLORS



MOON WHITE



MIAMI WHITE



MANHATTAN GREY



LIGHT GREY



MULTICOLOR



DARK GREY

← EARTH | MULTICOLOR 24" x 24"



13

2ČM



▲ **EARTH** | MOON WHITE 24" x 24" + 12" x 24" COPING



▲ EARTH | MIAMI WHITE 24" x 24"

15

Tile removed to show raised installation on pedestals. For more information, see pg. 39.





► **EARTH** DARK GREY 24" x 24"



FARMHOUSE LIVING 25M

STONE LOOK

SIZES



24" x 48" Rectified

Alabaster	1104235
Pewter	1104236
Millstone	1104237
Slate	1104238



24" x 24" Rectified

Alabaster	11042
Pewter	11042
Millstone	11042
Slate	11042

COLORS



ALABASTER



MILLSTONE



PEWTER




SLATE

√ FARMHOUSE LIVING | ALABASTER 24" x 48"



► FARMHOUSE LIVING | PEWTER 24" x 48"

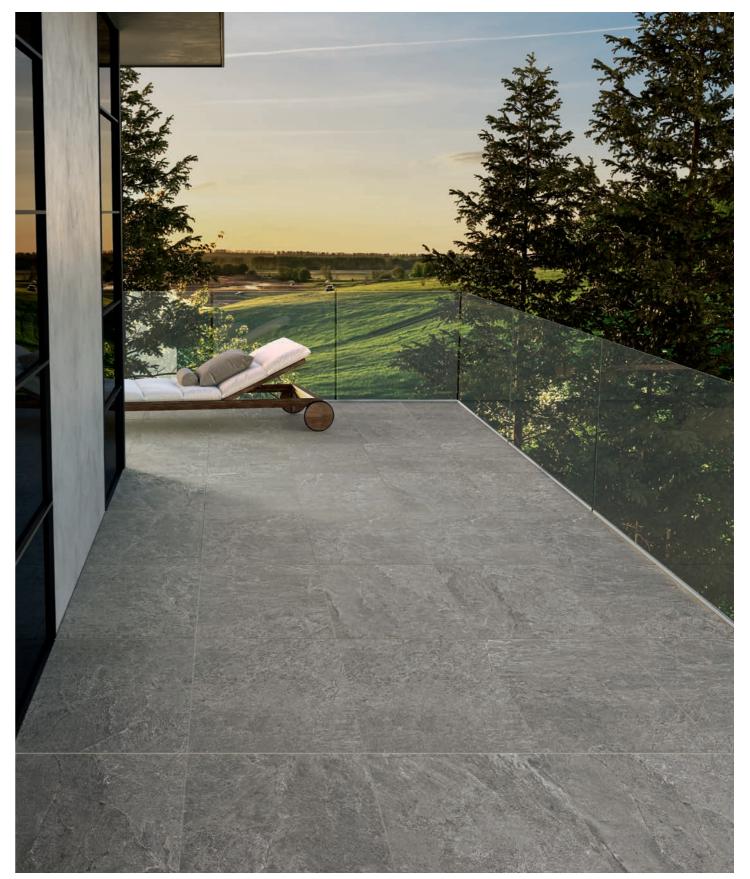

► **FARMHOUSE LIVING** | MILLSTONE 24" x 48"







STONE LOOK

SIZES







24" x 48" Rectified

Heirloom Blue 1103563 Antique Cream 1103562 Legacy White 1103561



24" x 36" Rectified

24" x 24" Rectified

Heirloom Blue 1103575

Antique Cream 1103574

Legacy White 1103573




12" x 24" Rectified

Heirloom Blue	1103578
Antique Cream	1103577
Legacy White	1103576



12" x 12" Rectified


Heirloom Blue	1103581
Antique Cream	1103580
Legacy White	1103579



Multisize Pattern

Uses: 24" x 36", 24" x 24", 12" x 24", 12" x 12"

COLORS









ANTIQUE CREAM




LEGACY WHITE

← LITH | HEIRLOOM BLUE 24" x 36" + 24" x 24" + 12" x 24" + 12" x 12"

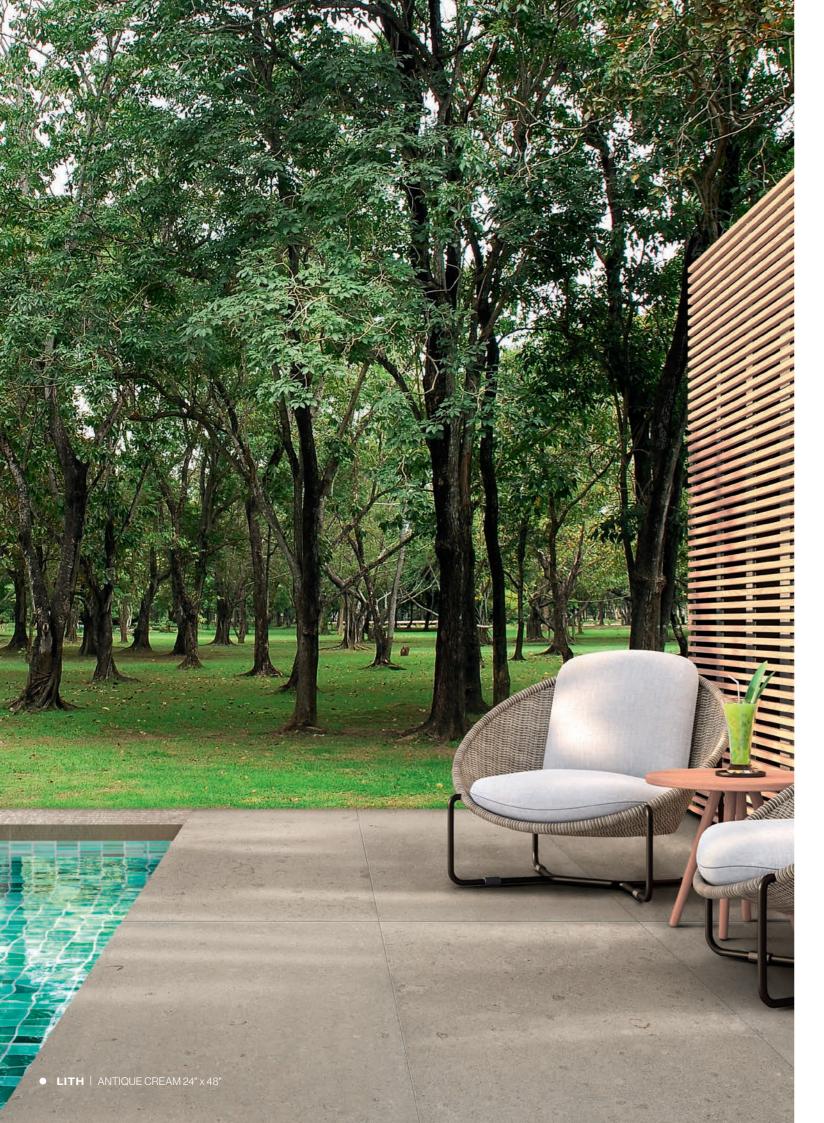

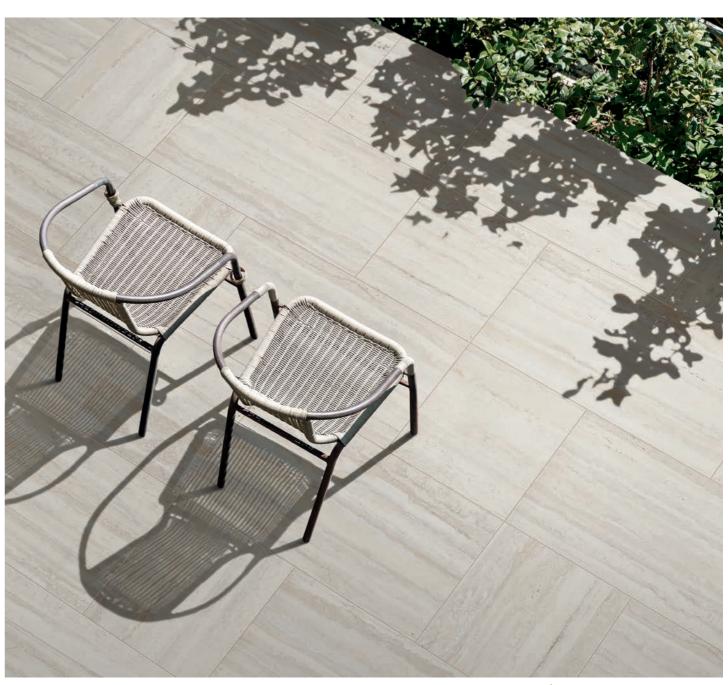

▲ **LITH** | LEGACY WHITE 24" x 24" + 24" x 48"

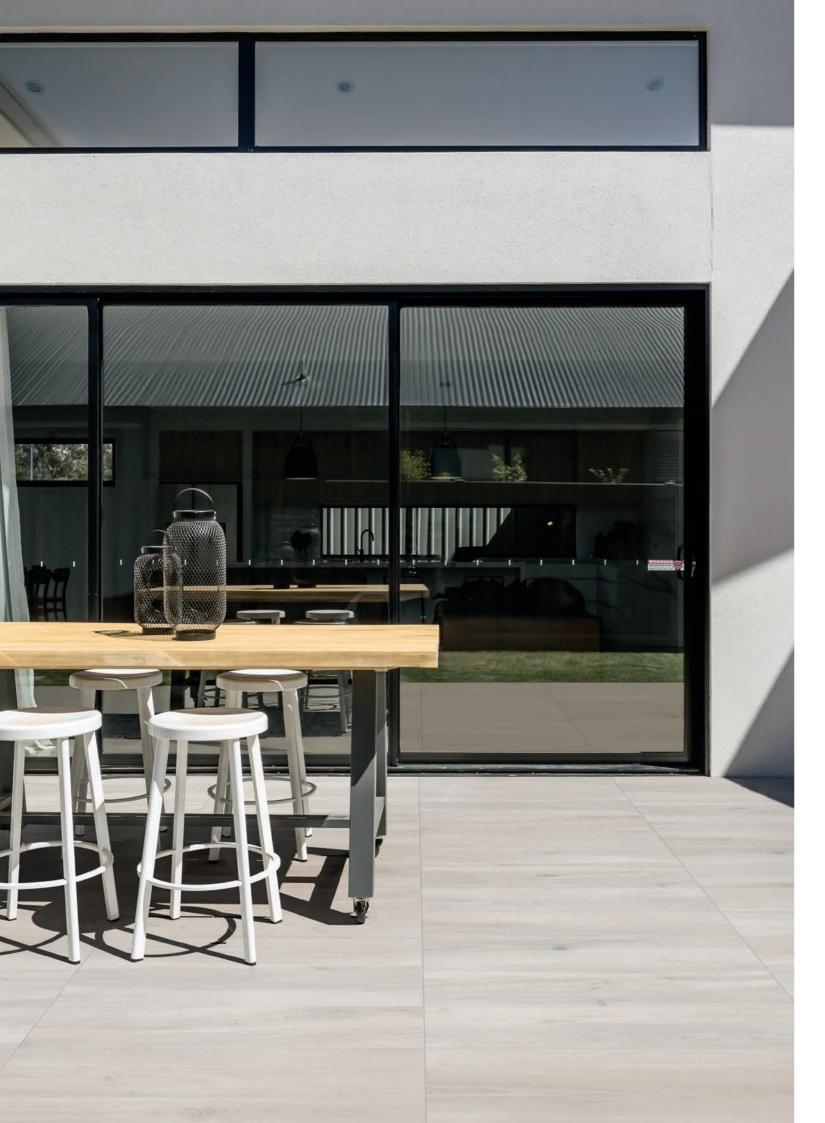

MOOD WOOD



WOOD LOOK

SIZES

12" x 48" Rectified

1100818 White 1100819 Honey 1100822 Grey

COLORS









HONEY

∢ MOOD WOOD | WHITE 12" x 48"

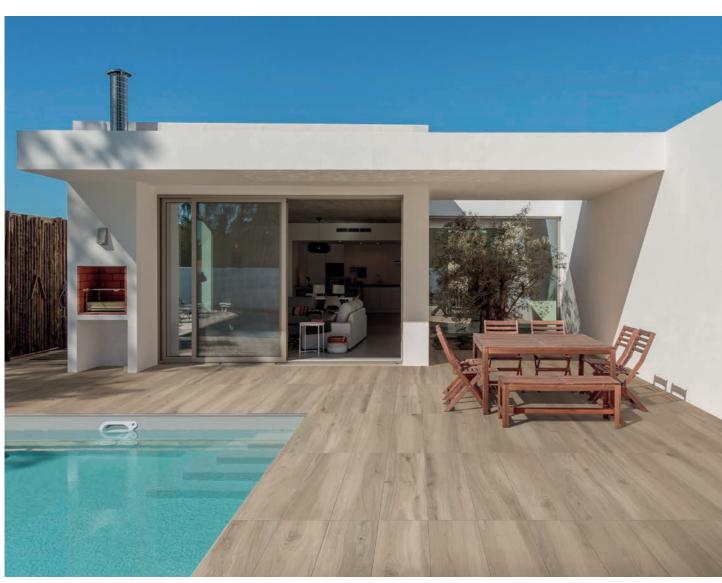

▲ MOOD WOOD | HONEY 12" x 48"

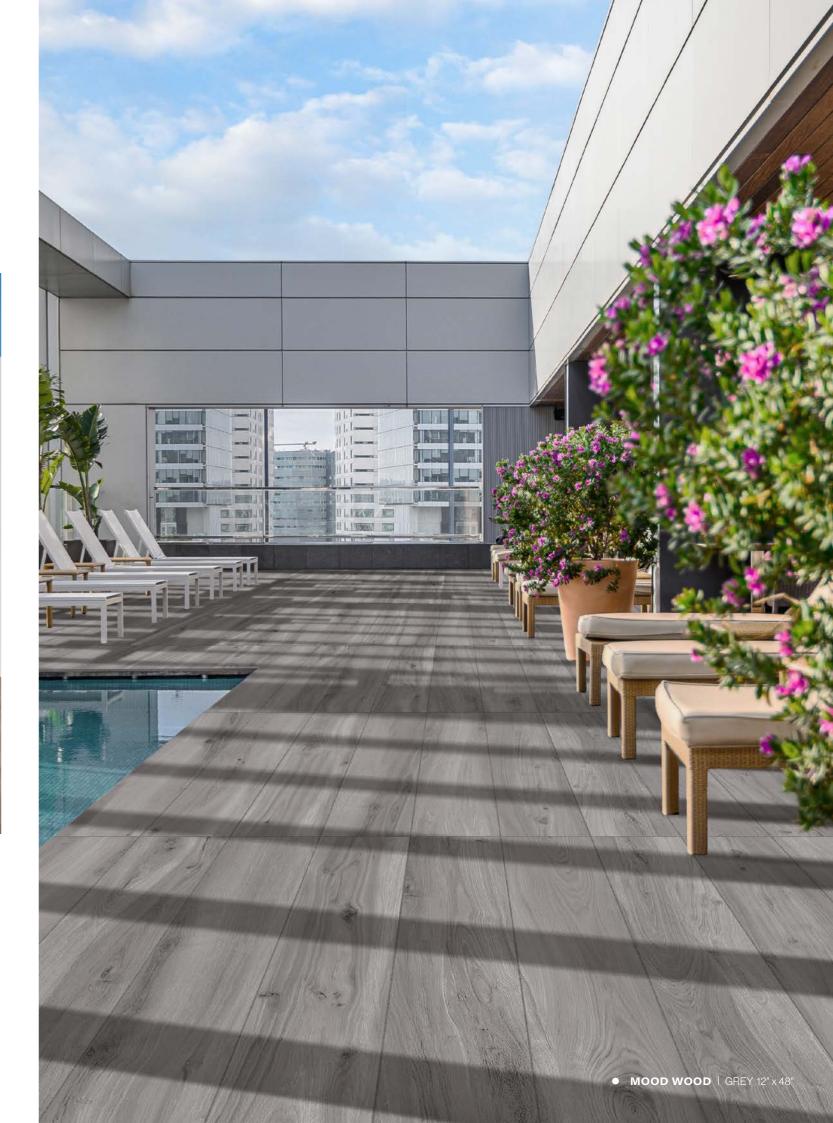



QUARTZ STONE LOOK



24" x 48" Rectified

Extra White 1101846 1101421 Grey 1101422



Extra White

White

Grey

1101848

1101426

1101427

12" x 48" Rectified

Extra White 1101847 1101423 White Grey 1101424

COLORS








WHITE




GREY

∢ QUARTZ | EXTRA WHITE 12" x 48"

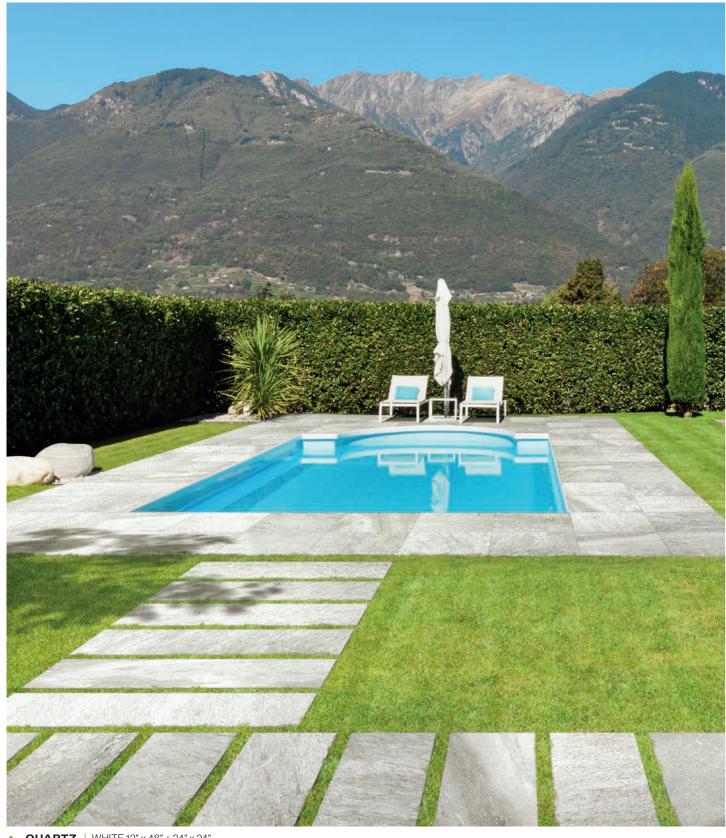

▲ **QUARTZ** | WHITE 12" x 48" + 24" x 24"

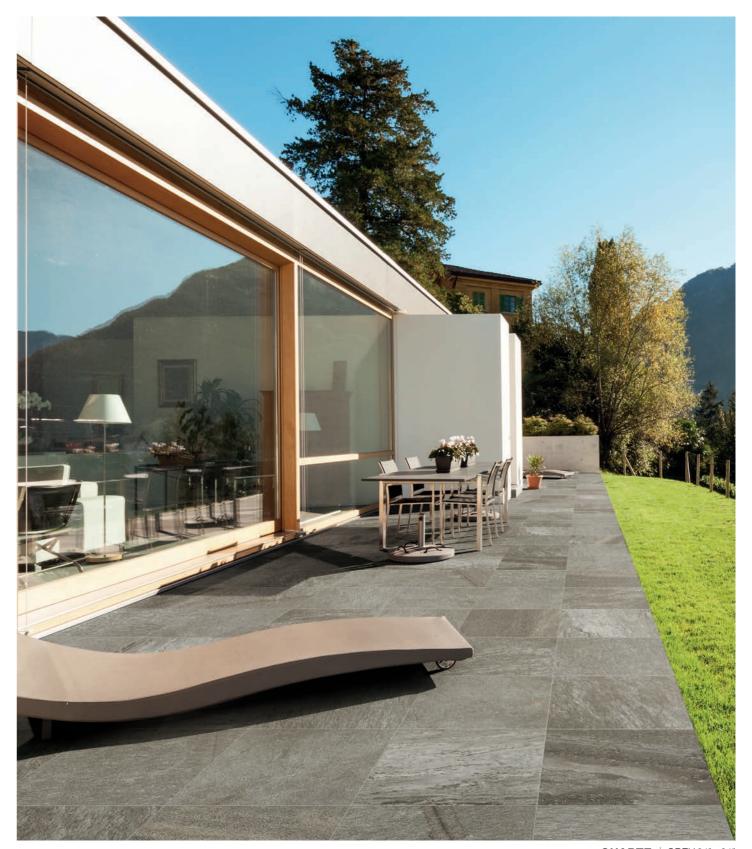



▲ QUARTZ | GREY 24" x 24"


TRIM SPECIFICATIONS




COPING

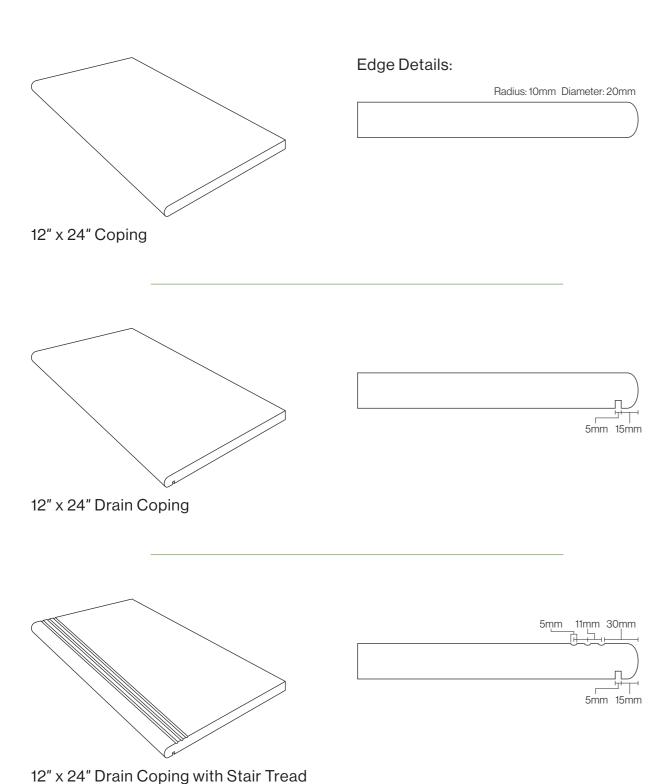

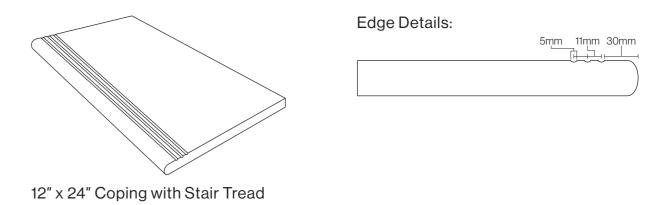

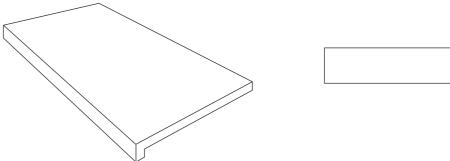



12" x 24" L-Shaped Coping

34 35

Trim pieces and field tiles may come in different shades, the slab's edge may show layers of differing hues.

Outdoor coping trim pieces available through special order only. Contact your sales representative for more information.

TECHNICAL SPECIFICATIONS

This product meets or exceeds all standards described in ANSI A137.3. Este product cumple o exceed todos los estandares de ANSI A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®stone VALUES
*	D.C.O.F.	ANSI A326.3	> 0.42 WET	> 0.55 WET
*	FREEZE / THAW RESISTANCE	ASTM C1026	AS REPORTED	RESISTANT
^	CHEMICAL RESISTANCE	ASTM C650	AS REPORTED	NOT AFFECTED
*	STAIN RESISTANCE	ASTM C1378	AS REPORTED	NOT AFFECTED
	MAXIMUM STRAIGHTNESS DEVIATION % IN RELATION TO CORRESPONDING PRODUCT DIMENSIONS	ASTM C485	± 0.40% (± 1.3 mm)	± 10%
3	THICKNESS VARIATION (THICKNESS RANGE WITHIN A MEASURED SAMPLE TESTED)	ASTM C499	± 1.5 mm (± 0.06 in)	± 0.5%
	LENGTH & WIDTH ADMITTED DEVIATION % OF AVERAGE SIZE OF EACH TILE FROM THE PRODUCTION DIMENSIONS	ASTM C499	± 0.5% (± 2 mm)	± 0.15%
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%
<u> </u>	BREAKING STRENGTH	ASTM C1505	≥ 2000 lbf AVERAGE (10.9 Kn)	≥ 2700 lbf INDIVIDUAL
*	RESISTANCE OF DEEP ABRASION OF UNGLAZED TILES	ASTM C1243	175 mm³	< 150 mm³
11	THERMAL SHOCK RESISTANCE	ASTM C484	PASS	MEETS REQUIREMENT

[•] Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

PACKAGING SPECIFICATIONS

SIZES		THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
12"x12" RECTIFIED	NOMINAL	20 mm	5	5 SF	45 LBS	45	225 SF	2,025 LBS
12"x24" RECTIFIED	NOMINAL	20 mm	4	8 SF	72 LBS	40	320 SF	2,880 LBS
12"x48" RECTIFIED	NOMINAL	20 mm	4	16 SF	147 LBS	16	256 SF	2,352 LBS
24"x24" RECTIFIED	NOMINAL	20 mm	2	8 SF	72 LBS	36	288 SF	2,592 LBS
24"x36" RECTIFIED	NOMINAL	20 mm	2	12 SF	108 LBS	16	192 SF	1,728 LBS
24"x48" RECTIFIED	NOMINAL	20 mm	2	16 SF	144 LBS	16	256 SF	2,304 LBS
QUARTZ 24"x48" RECTIFIED	NOMINAL	20 mm	2	15.5 SF	139.5 LBS	16	248 SF	2,232 LBS
COPING								
12"x24" COPING	NOMINAL	20 mm	4	8 SF	73.6 LBS	40	160 PCS	2,944 LBS
12"x24" STAIR TREAD COPING	NOMINAL	20 mm	4	8 SF	73.6 LBS	40	160 PCS	2,944 LBS
12"x24" DRAIN COPING	NOMINAL	20 mm	4	8 SF	73.6 LBS	40	160 PCS	2,944 LBS
12"x24" DRAIN COPING WITH STAIR TREAD	NOMINAL	20 mm	4	8 SF	73.6 LBS	40	160 PCS	2,944 LBS
12"x24" L-SHAPED COPING	NOMINAL	20 mm	4	8 SF	73.6 LBS	40	160 PSC	2,944 LBS

^{*}WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF. All other sizes will be packaged as ordered. Please contact MILE®stone Customer Service at 1-877-356-7461 for packaging information.

Minimum grout size recommended = 5 mm (or approx. 3/16") If staggered tile placement, we recommend using a 30% offset. If specified brick pattern with 1/2 pattern mandatory, a bigger grout is recommended to hide imperfections of installation (minimum 1/4").

37

2**č**m

GREEN MEMBERSHIPS & ACCREDITATIONS

DESCRIPTION

	DESCRIPTION
Scholed Coule	Defines post-consumer content of as much as 3% recycled glass which reduces landfill impact.
Secreted Coulo	Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint.
	Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint.
G GREEN SQUARED	Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.
Environment PRIORITY ONE	A declaration that Florim USA values the environment and works daily to minimize our adverse impact upon it.
VERSION 2.0	The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.
Red List Free	Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our products.
Certified Environmental Product Declaration www.nst.org	Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.
GREENGUARD PROCESSION AND PROCESSIO	Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.
Product Certification BUREAU VERITAS Certification	Bureau Veritas Standards Program verifies and certifies both pre- and post-consumer recycled content.
TILE COUNCIL OF NORTH AMERICA, INC.	Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.
TEMBER OF	USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.
INTERNATIONAL LIVING FUTURE	Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community.
	The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.

Progress that invests in the entire society

As an active member of the U.S. Green Building Council, MILE*stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices.

Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- · Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE*stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality by 2030.



2**c**M 41